

# Combi



## ■ SURFACE DISTRIBUTION ENCLOSURES




Combi Series of surface distribution enclosures are supplied with transparent (UV protected) or opaque windows with vertical opening and an ergonomic design.

**They are made from halogen free long-lasting plastic material.** The cover can be clipped onto the base or fixed with screws. The DIN rail is mounted without screws while in the 24 and 36 modules units a stretcher is incorporated to facilitate its adjustment.

The base incorporates easy-breaking pre-moulded slots for cable entry (metric system), as well as on the sides allowing side by side assamblage of the enclosures.

Also, all of them are prepared for installation of earth and neutral bars.

These series are complemented with two types of sealable terminal-covers enclosures of two and four modules.

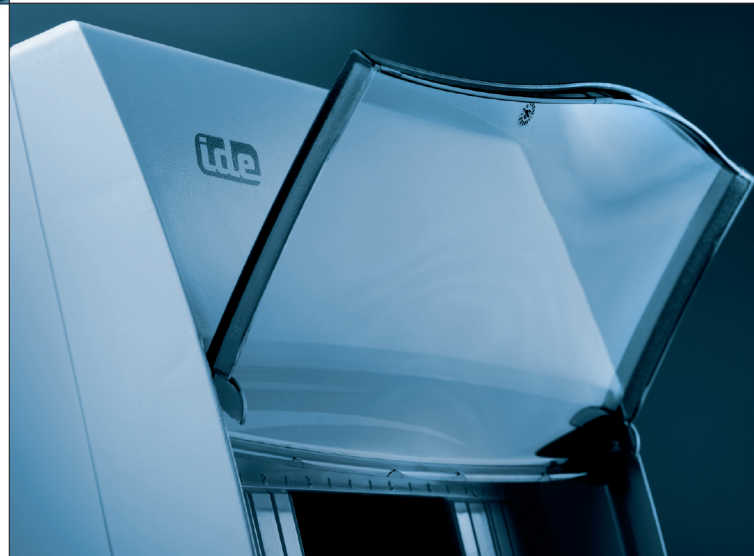

### TECHNICAL DATA

■ degree of protection	IP40*
■ resistance to impact	IK08
■ auto-extinguishing degree	HB (UL94)
■ test of resistance to glow wire	650° C
■ ball pressure test	70° C

*According to 2006/95/CE directive and EN 60439-1 and UNE-EN 60439-3 norms on affected parts.*

\*Except on 40SP2 and 40SP4 types